

Lincoln

Model 8060 Wood Burning Stove

The Soapstone Family

A perfect HearthStone log burner for small spaces.



Efficiency

78.5%

HHV



HeatLife™

9.5

Hours



EPA Certified

1.14

g/hr



Features

TruHybrid™ System

Technology so advanced, you can get up to a 30% tax credit (IRS 25C) for the entire installation!

Soapstone Comfort

Full soapstone + cast iron construction offers comfortable, long-lasting heat and a lifetime of trouble free service.

Convenient Features

A square cook plate on the top of the stove is great for warming things up. It also provides easy access to the catalyst for servicing.



Stove Design

The Lincoln was designed to be simple to use, easy to maintain, and sized for small living spaces.

Ideal for small spaces

Designed as a traditional ‘log burner’, the Lincoln burns full size cord wood (we recommend 16"), but fits in tight spaces. It’s perfect for cabins, accessory dwelling units, or smaller rooms within your home. Optional heat shields can be added to either side and the back of the stove so it can be tucked tightly into corners taking up less space.

Enameled cook plate

The square plate on the top of the stove is finished with our food grade enamel, so it’s easy to heat things up and clean up any spills.

Sliding catalyst system

The catalyst slides back to engage once the fire is hot. The slide system helps you remember to engage the catalyst for a clean burn. And, with the cook plate removed, you have easy access to check and clean the system.



Accessories

1. Rear Heat Shield..... 90-68601

The rear heat shield clips onto the back of the stove, reducing the required distance between the stove and the wall behind it. Refer to the owner’s manual for clearance information.

2. Side Heat Shield.....90-68605

The side heat shield clips onto either the left side, right side, or both sides of the stove, reducing the required distance between the stove and the wall next to it. Refer to the owner’s manual for clearance information.

3. Outside Air Starter Kit, 3" 96-53400

Bring air into your stove from outside of your house to ensure proper combustion and keep more heat in your home. Recommended for newer well-sealed homes. 3" ducting not included. Refer to the owner’s manual for installation.

4. Outside Air Increaser, 3" to 4" 90-53308

Adapts the outside air starter to a 4" duct for longer ducts.

5. Leather Safety Gloves90-99031

Thick and protective leather with a soft lining. One size fits all.

6. Stove Top Thermometer90-99120

Recommended for soapstone stoves, the stove top thermometer helps you keep your stove burning within optimal temperatures.

7. Soapstone Steamer 90-99112

Recommended for all wood burning stoves, the steamer adds moisture to the air to balance the drying effects of a wood fire.



4



5




6




7



Dimensions

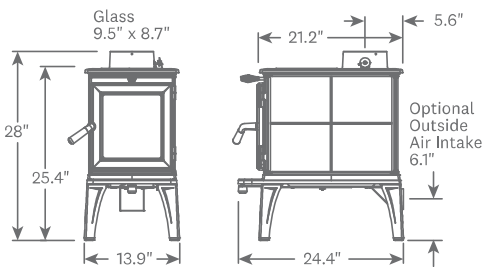

Hearth Protection

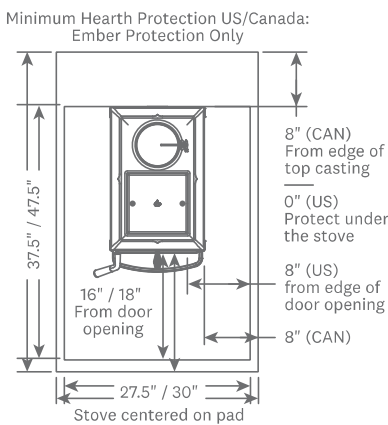

Specifications

- HHV Efficiency78.5%
- HeatLife™*9.5 hours
- EPA Certified1.14 g/hr
- Heats up to.....575 sq ft
- Firebox Capacity.....1.0 cu ft
- BTUs/hrUp to 23,000
- Maximum Log Length18", 16" recommended
- Flue Exit & DiameterTop - 6"
- Weight195 lbs

* Under the right conditions, you will be able to start a new fire with kindling up to the end of the product's HeatLife™.

Clearances

These clearances require double-wall connector pipe

No heat shields

With side & rear heat shields*

	Side	Rear	Corner
No heat shields	22"	9"	13.75"
With side & rear heat shields*	9"	3.5"	7.25"

* Heat shields can be applied independently to achieve the clearance listed for that specific heat shield.

Note: Reference your pipe manufacturer's clearances as well as local building codes to ensure a safe installation. Single-wall connector pipe generally requires 18 inches of clearance.

Finish Options



Matte Black



The Lincoln 8060 Wood Burning Stove



Morrisville, Vermont
www.hearthstonestoves.com